RT-RTE International Sales Manual

Pro Gear's Hendrickson RT-RTE International Sales Manual to assist in identifying your Hendrickson unit.

If you need any assistance identifying the correct transfer case unit for your truck and equipment, contact your Hendrickson replacement part specialists at Pro Gear and Transmission.

Pro Gear Transmission has same day shipping and 1000’s of products in stock and ready to ship internationally for your next project.

For parts or service contact the Hendrickson specialists at Pro Gear & Transmission, Inc.

1 (877) 776-4600
(407) 872-1901
parts@eprogear.com

RT™ SERIES Durable Steel Leaf Spring Suspension

Increase stability and job site maneuverability with RT™ on International® Trucks

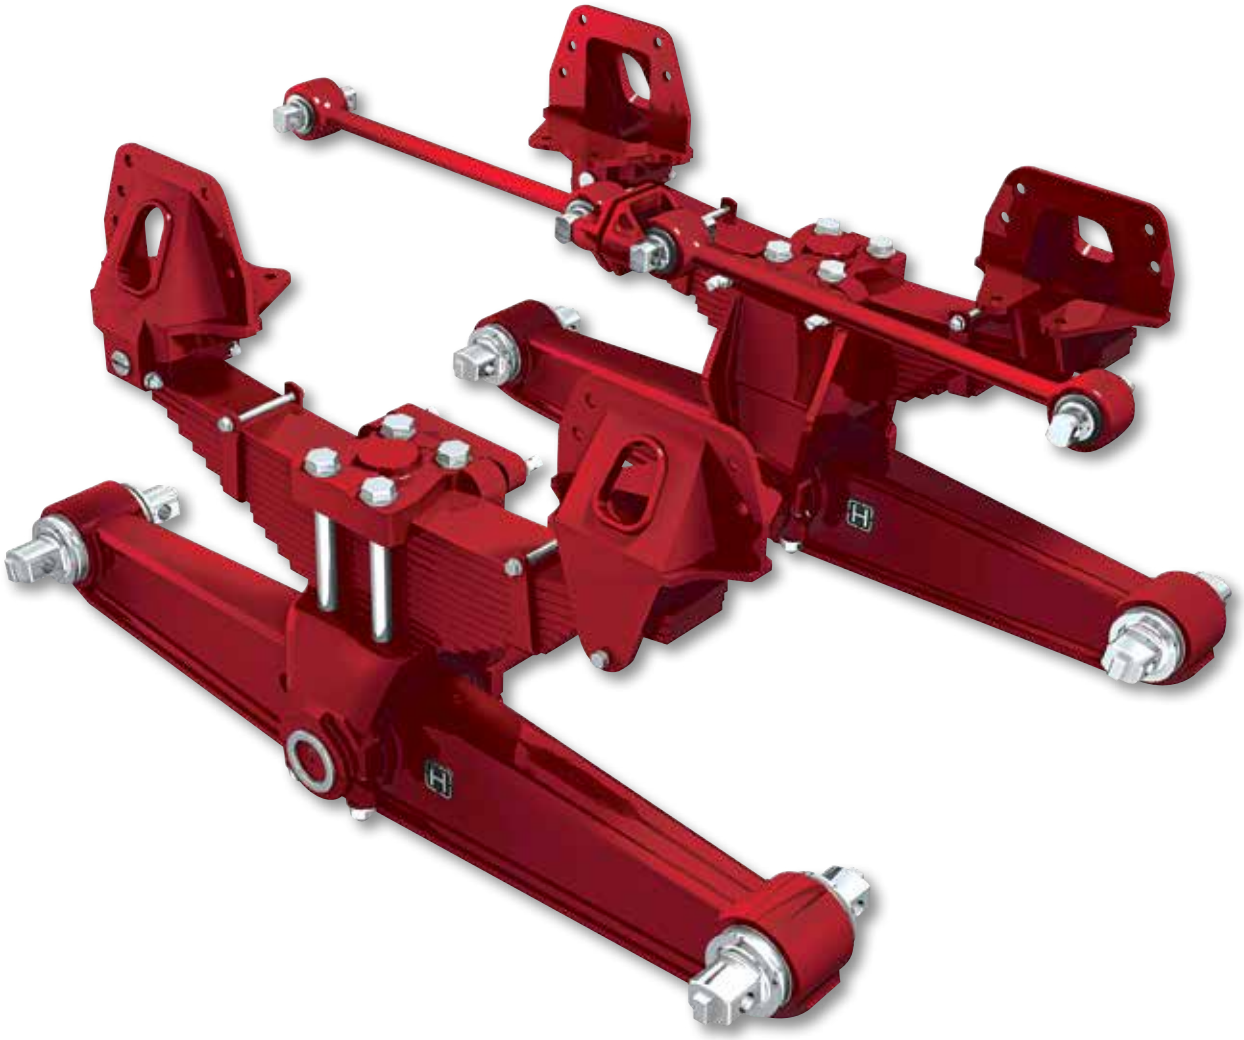

Built on a legacy of durability and traction, the Hendrickson RT™ Series has been the standard in the vocational truck industry for over 100 years. The RT Series utilizes Hendrickson's walking beam technology for greater mobility on punishing job sites.

To learn more about RT SERIES, call 855.743.3733 or visit www.hendrickson-intl.com

HENDRICKSON
The World Rides On Us®

RT™ for International® Trucks

No. 1 Spring Hanger
- Helps absorb the forces of braking and acceleration, while providing longer hanger and spring eye bushing life

Spring Pack
- Genuine Hendrickson springs are made from high-strength steel
- Heat treated and shot peened for exceptional fatigue life

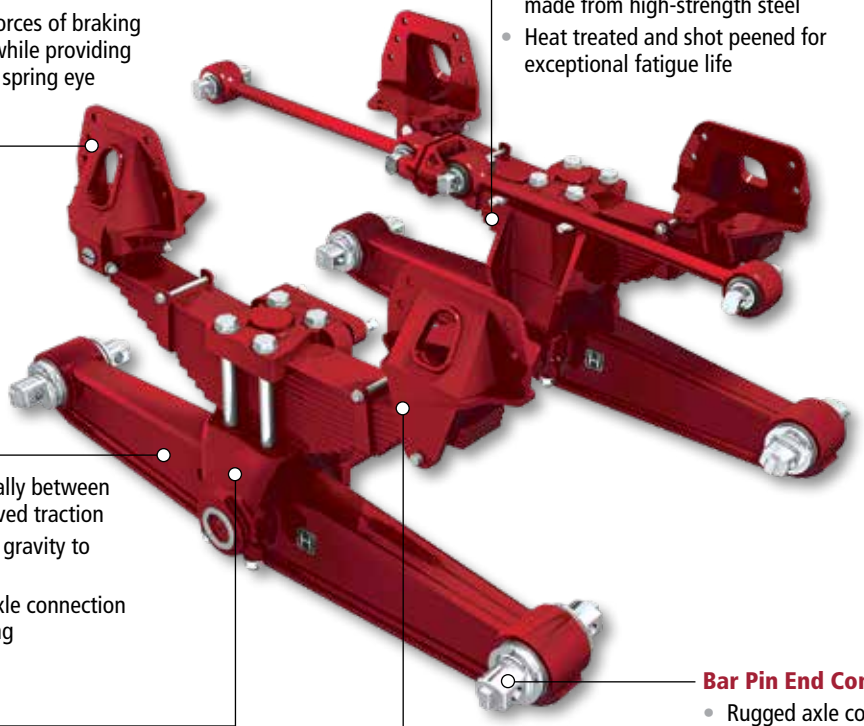

Equalizing Beam
- Distributes load equally between both axles for improved traction
- Lowers the center of gravity to increase stability
- Establishes a solid axle connection for improved handling

Saddle
- Engineered to increase durability without adding weight
- High stress concentration areas are fortified for strength and durability

Bar Pin End Connection
- Rugged axle connection extends bushing life and allows easy axle alignment

No. 2 Spring Hanger
- Cam and leg areas receive a special flame hardening treatment that increases durability and extends life

RT Feature Codes

International Model	Feature Code	RT Capacity	Center Bushing	Axle Spacing
HV	14ULP	34,000 lbs.	*Rubber	52 in.
HV	14UHC	40,000 lbs.	*Rubber	52 in.
HV	14UHE	40,000 lbs.	*Rubber	60 in.
HX / HV	14UHD	40,000 lbs.	*Rubber	54 in.
HX / HV	14UHK	46,000 lbs.	Bronze	54 in.
HX / HV	14UHL	46,000 lbs.	*Rubber	60 in.
HX / HV	14698	52,000 lbs.	Bronze	54 in.
HX	14524	65,000 lbs.	*Rubber	56 in.

Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.
All applications must comply with applicable Hendrickson specifications and must be approved by the respective vehicle manufacturer with the vehicle in its original, as-built configuration.
Contact Hendrickson for additional details regarding specifications, applications, capacities, and operation, service and maintenance instructions.

*Call Hendrickson at **630.910.2800** or **855.RIDERED (743.3733)** for additional information.*

HENDRICKSON®

www.hendrickson-intl.com

TRUCK COMMERCIAL VEHICLE SYSTEMS
800 South Frontage Road
Woodridge, IL 60517-4904 USA
855.RIDERED (743.3733)
630.910.2800 • Fax 630.910.2899

www.internationaltrucks.com

45745-379 Rev B 05-19

© 2014 - 2019 Hendrickson USA, L.L.C. All Rights Reserved. All trademarks shown are owned by Hendrickson USA, L.L.C., or one of its affiliates, in one or more countries, except for International and the International logo, which are owned by International Truck Intellectual Property Company, LLC or one of its affiliates. Information contained in this literature was accurate at the time of publication. Product changes may have been made after the copyright date that are not reflected.

Printed in United States of America

Pro Gear and Transmission • 906 W. Gore St. Orlando, FL 32805 • 1 (877) 776-4600 / (407) 872-1901 • parts@eprogear.com